



**SatCR
Supported**



DOLBY

Strong performance in HD

Enjoy HD pictures and surround sound with SRT 7004. With this receiver you can playback multimedia files on the TV screen. Moreover, there are additional features when connecting the receiver to the Internet via Ethernet, such as RSS feeds and weather forecasts. This low power consumption receiver has a wide range of features and effortless operation. Have fun with home entertainment in HD.

- HDTV (1080p) receiver for digital* Free-To-Air TV and radio programmes via satellite*
- RSS feeds and weather forecasts via Internet portal
- USB port for playback of multimedia files** and software update
- Display showing channel number in operating mode and time in standby
- 4000 channels/64 satellites memory capacity (50 satellites pre-installed)
- Exceptional picture quality and excellent sound
- HDTV (1080p) receiver for digital* Free-To-Air TV and radio programmes via satellite*
- RSS feeds and weather forecasts via Internet portal

Subject to your local signal conditions; **STRONG cannot guarantee the playback of files although extensions are listed, as it depends on codec used, data bit rate and resolution; ***Availability depending on broadcaster; ****Dolby and the double-D symbol are registered trademarks of Dolby Laboratories



4000
Channels



HD
TV

DisEqC12

DVB S2




Picture similar

- Multichannel Electronic Programme Guide (EPG) for on screen information of present/next programme information for the following 7 days***
- Booking of events directly from EPG
- Up to 30 programmable timers
- Dolby® Digital Plus****
- Power saving: switches to standby after a definable time
- Software update via external USB storage device
- Fast and easy channel data base up/download to/from USB stick
- Teletext and full multi-lingual DVB subtitling supported***
- Multiple audio track support***
- 8 favourite lists for TV and radio channels

- Parental control for locking selected channels with a password
- Multi-lingual On Screen Display (OSD)
- Easy to use channel handling options for finding, editing, moving, favouring and locking of channels
- Power on with last viewed channel
- Video outputs: HDMI, SCART (RGB, CVBS)
- Digital audio output via S/PDIF coaxial for connection to a digital amplifier
- Automatic, network and manual channel scan options
- Supports MPEG-2, MPEG-4 and H.264
- Supports Tone burst, DiSEqC 1.0, 1.1, 1.2, GOTO X and SatCR
- **Connections:** Ethernet, SAT IN, SAT OUT, HDMI, TV SCART, S/PDIF coaxial, USB

Subject to your local signal conditions; **STRONG cannot guarantee the playback of files although extensions are listed, as it depends on codec used, data bit rate and resolution; ***Availability depending on broadcaster; ****Dolby and the double-D symbol are registered trademarks of Dolby Laboratories

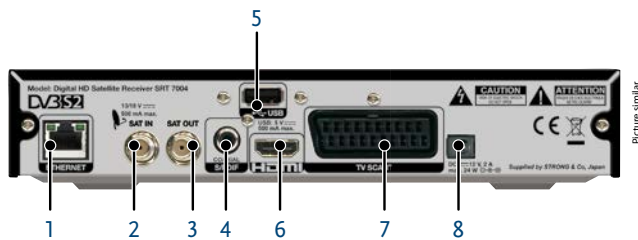

Picture similar

1. Ethernet
2. Satellite antenna
3. 2nd receiver (loop through)
4. Digital audio amplifier
5. USB
6. TV (HDMI)
7. TV (Scart)
8. Power cable

Demodulator

Demodulation: QPSK, 8PSK
Input symbol rate: DVB-S QPSK: 1 ~ 45 Ms/s
DVB-S2 8PSK/QPSK: 10~30 Ms/s
FEC decoder: Auto, 1/2, 2/3, 3/4, 5/6, 7/8 in DVB-S mode
1/2, 3/5, 2/3, 3/4, 4/5, 5/6, 8/9, 9/10 in DVB-S2 mode
3/5, 2/3, 3/4, 5/6, 8/9, 9/10 in 8PSK mode

Video Decoder

Profile level: MPEG-2 MP@ML, MP@HL, MPEG-4 H.264/AVC
Input rate: Max. 20 Mbit/s
Aspect ratio: 4:3 and 16:9, Pan & Scan, Pillarbox, Letterbox, Auto
Video resolution: PAL 50Hz: 576i, 720p, 1080i, 1080p

*Dolby® and the double-D symbol are registered trademarks of Dolby® Laboratories

Audio Decoder

Audio decoding: MPEG-1 Layer 1 & 2, AC3 Downmix
Audio mode: Mono L/R, Stereo, Dolby® Digital, Dolby® Digital Plus*
Sampling rate: 32, 44.1, 48 kHz

Tuner

Type1 F Type, IEC169-24, Female
Input frequency range: 950 – 2150 MHz
RF impedance: 75 Ohm unbalanced
Signal level: -65 to -25 dBm
LNB power: 13/18 V DC (+/- 5%), max. 0.5 A, overload protected
DiSEqC versions: 1.0, 1.1, 1.2, GOTO X, Toneburst, SatCR

System & memory

Main processor: NOVATEK NT78326SU
Flash memory: 8 MBytes
System memory: 128 MBytes

Connectors

SAT IN
SAT OUT
HDMI
TV SCART (RGB, CVBS, Audio L/R output with volume control)
Digital audio S/PDIF coaxial
USB 2.0, Type A Connector (5 V/500 mA)
Ethernet

General Data

Supply voltage: 100 – 240V AC 50/60Hz
Output voltage: DC 12V, 2A
Power consumption: max. 24 W, typ. 10 W
Power consumption in standby: 0.65 W
Operating temperature: 0 ~ +40° C
Storage temperature: -10 ~ +50° C
Operating humidity range: 10 ~ 85% RH, Non-condensing
Size (W x D x H) in mm: 220 x 170 x 45
Weight: 0.68 kg

SRT 7004 EAN: 8717185447729

HOTLINE	AT	0820 400 150 support_at@strong.tv	BG	+359 32 634451 support_bg@strong.tv	IT	199 404 032 support_it@strong.tv
	DE	0180 501 49 91 support_de@strong.tv	FR	0826 029 928 support_fr@strong.tv	Da rete fissa 24,8 cent. al min. 12,5 cent. scatto alla risposta Da rete mobile max 49 cent. al min. 15,6 cent. scatto alla risposta	
	DK	support_dk@strong.tv	CZ HU SK	+36 24 445 282 support_hu@strong.tv	PL	801 702 017 support_pl@strong.tv
	NL	support_nl@strong.tv	UA	+380(44)228-24-73 support_ua@strong.tv		
	€ 0,12/Min. österr. Festnetz		€ 0,15 par mn poste fixe en France		801 702 017 support_pl@strong.tv	
	€ 0,14/Min. deutsches Festnetz € 0,42/Min. max. Mobilfunknetz					

STRONG declares that this item complies with the basic requirements and other relevant regulations of directives CE 2004/108/EC and 73/23/EC, RoHS 2002/95/EC
Subject to alterations. In consequence of continuous research and development technical specifications, design and appearance of products may change. HDMI, the HDMI logo and High-Definition Multimedia Interface are trademarks or registered trademarks of HDMI Licensing LLC in the United States and other countries. Dolby® and the double-D symbol are registered trademarks of Dolby® Laboratories. All other product names are trademarks or registered trademarks of their respective owners. © STRONG 2014. All rights reserved.